

RETAIL WEIGHING SOLUTION™

PR-II series

Price Computing Scale

As an electronic price-indicating scale with a maximum of 1/30,000 resolution, PR-II is designed in a low profile to be conveniently used in open market such as butcher's shop and groceries.



Pole Type

High Resolution for Weighing (Max. 1/30,000, Certificate 1/3,000 dual)

Low Profile Design

Up to 7 Direct PLUs Memory Function

LCD Display & Back light (White)

Low Profile Design

Existing Products

PR-II



7 Direct PLUs

M1 100g	M5	7	8	9	+0<
M2 100g	M6	4	5	6	+T<
M3 100g	M7	1	2	3	+
M4 100g	PR SAVE	0	.	C	Σ

LCD Display & White Back light



Scan with your smartphone
to find more products



CAS
www.globalcas.com

PR-II series

Price Computing Scale



FEATURE

- High Resolution for Weighing (Max. 1/30,000)
- A maximum of 900 hours of battery life when used with Mn and Pb batteries together

- Low Profile Design

- Excellent applicability in open market with a low body

- Hi / OK / Low Limit Function

- USB Port for COMM. & Power (Option)



- Price Summation & Pay Function

- Up to 7 Direct PLUs Memory Function



- LCD Display & Back light (White)



- Rear Display for Customer (Bench type)

OPTION

- RS-232 (Print, Command)
- Pole Type
- Mn Battery
- USB Port




Bench Type

SPECIFICATIONS

MODEL	PR2-03	PR2-06	PR2-15	PR2-30
Capacity	3kg	6kg	15kg	30kg
e	0.5/0.2/0.1(g) 1/0.5g(certificated)	1/0.5/0.2(g) 1/0.5g(certificated)	2/1/0.5(g) 5/2g(certificated)	5/2/1(g) 10/5g(certificated)
Resolution	1/3,000 ~ 1/30,000	1/3,000 ~ 1/30,000	1/3,000 ~ 1/30,000	1/3,000 ~ 1/30,000
Display	6/6/6 Digit LCD & Back light (White) Minimumum			
Symbols	STABLE, ZERO, TARE, Battery Remaining battery life indicated HI / OK / LO & Lb & 100g & Oz & ADD & PAY(Triangular symbol indicated)			
Keys	NUMBER, ZERO, TARE, FUNCTION, M1 ~ M7 KEY			
Functions	Direct PLU 7, Unit Conversion, Power Sleep Mode, Backlight Mode, Price Summation and Pay Function			
Operation Time	Approx. D size Battery = 500hr Or Pb Battery = 400hr (Backlight off) Approximately 900 hours consecutively when equipped with Mn Battery and Pb Battery together			
Option	RS-232 (Print, Command), Pole Type, Mn Battery, USB Port			
Power	1.5V x 3 units (D size Battery) or Pb battery 4V 4Ah or 6V Adapter			
Dimensions	330 (W) x 380(D) x 105(H)			
Platter Size	330 (W) x 235(D)			

DIMENSION

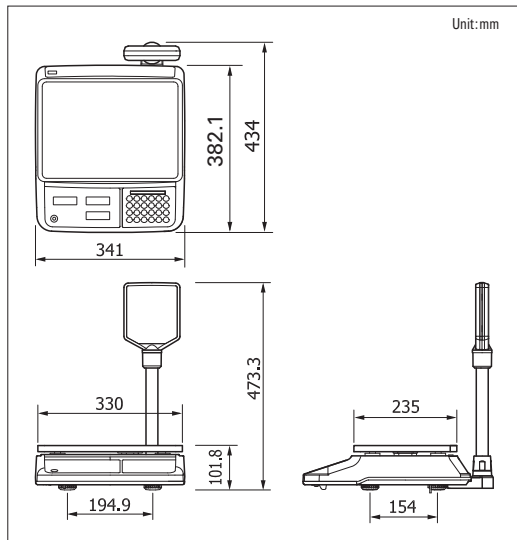

CAS BLDG., 1315, YANGJAE-DAERO,
GANGDONG-GU, SEOUL, KOREA

TEL. 82 2 2225 3500

FAX. 82 2 475 4668

Specifications are subject to change without notice improvement



CAS

<http://www.globalcas.com>