

## DGT100

### DGT100: MAXI WEIGHT INDICATOR- UNIVERSAL REPEATER



Weight indicator/ repeater with large matrix display composed of very intense bright LEDs. Particularly suitable for outdoor uses, it is clearly visible even in full sunlight and where it's necessary to view from a distance at any angle. Case completely in IP68 stainless steel. CE-M approved (OIML R-76 / EN 45501). MID approved (OIML R-61).

Working in cooperation with:

**PT. INTERSKALA MANDIRI INDONESIA**

GREEN SEDAYU BIZPARK, BLOK DM 11, N 62 - 11840 - KALIDERES, JAKARTA BARAT - INDONESIA  
Tel. +62 21 555 1470 Fax. +6221 555 1953  
interscale@yahoo.com

The best solution  
for advanced  
industrial  
applications

## MAIN FEATURES

- Functional 5-key waterproof keypad.
- Large 6-digit display, 100 mm high, with very efficient SMD LEDs, complete of 6 Leds for indication of active functions, visible from over 25 m, with viewing angle up to 120° and with power up to 750 mcd.
- Software adjustment of the brightness intensity by keyboard.
- AISI 304 stainless steel case with IP68 protection complete of wall fixing bracket.
- Fitted with an anti condensation air valve for regulating the humidity and the pressure inside the indicator.
- Calibration, Set-Up parameters, configurable from keyboard or from PC with DINI TOOLS.
- Max. 10.000e or multirange 2 x 3000e @ 0,3  $\mu$ V/e in CE-M approved version for legal for trade use.
- Max. 1.000.000 displayable divisions viewable with internal resolution up to 3.000.000 points.
- Up to 8 signal linearisation points with DINITOOLS.
- A/D 24 bit sigma-delta 4-channel conversion, max.400 conv./sec. with automatic selection.
- Connectable with up to 8 analogue load cells with 350 Ohm input resistance.
- Management of a weighing system with up to 4 cells with digital equalisation or management of up to 4 independent weighing systems.
- Power supply from 12 to 24 Vdc with 110-240 Vac internal power supplier.
- Available as Scale or as Repeater version.

## MAIN CERTIFICATIONS

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R61 - MID
- OIML R51


## I/O SECTION

- RS232/C bidirectional port configurable for connection to printer, PC, or other external units.
- RS485 bidirectional port configurable for connection to PC, PLC, or other external units.
- PROFIBUS serial interface (DGT100PB model).
- 2 photomofet outputs: 150 mA 48 Vac / 150 mA 60 Vdc (NO), with configurable functions.
- 2 optoisolator photocouplers: 12÷24 Vdc, 5 mA min - 20 mA max, with configurable functions.
- 16-bit analogue output (DGT100AN model) 4-20mA / 0-5Vdc / 0-10Vdc at choice; maximum applicable voltage: 300 Ohm; minimum applicable voltage resistance: 1 kohm.

## DGT100BC / DGT100AN / DGT100PB FUNCTIONS

- **THROUGH KEYBOARD:**  
Zeroing; Semi automatic and presettable tare, print and/or data transmission; ON/Stand-by.
- **SELECTABLE:**  
High Resolution Weighing x 10; Net/Gross or lb/kg conversion; Weighs totalisation; Formulation; Approved transmission of the weight to PC/PLC (with ALMEM Alibi memory option); Counting; In/Out Truck weighing; Hold e Peak.
- **EXTERNAL INPUT:**  
Simulation of key pressure; Keyboard lock.
- **MOSFET OUTPUT:**  
Set Point Control on the weight, either positive (in loading) or negative (in unloading), or on the pieces (counting mode), with programmable enabling/disabling thresholds, as direct check or upon weight stability.
- **SERIAL PORTS:**  
On all models: Reading of the net, gross, and tare weights; Clearing; Semi automatic and presettable tare; Scale switch; Setting of outputs activation thresholds; Reading/Writing of Alibi Memory.  
DGT100BC and DGT100AN models: Reading of microvolts or ADC converter for all the channels; Message display; Printing; Setting of APW in counting mode; Simulation of key pressure; MODBUS serial protocol.
- **THROUGH 16 bit ANALOGUE OUTPUT (DGT100AN):**  
Analogue output proportional to the net or gross weight, either positive (in loading) or negative (in unloading).

## DETAIL 1

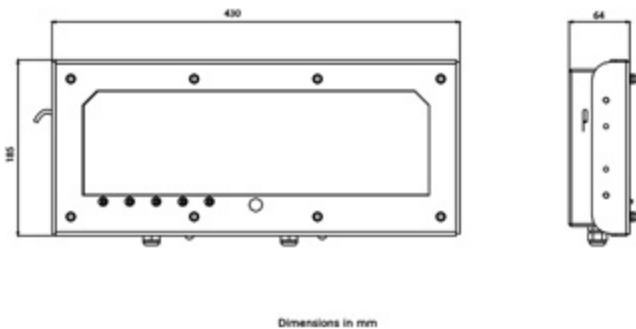



[www.diniargeo.com](http://www.diniargeo.com)

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO  
FRANCE sarl  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano - Modena - Italy  
Tel. +39.0536 843418

***PT.INTERSKALA MANDIRI INDONESIA***

GREEN SEDAYU BIZPARK, BLOK DM 11, N 62 - 11840 - KALIDERES, JAKARTA BARAT - INDONESIA

Tel. +62 21 555 1470 Fax. +6221 555 1953

[interscale@yahoo.com](mailto:interscale@yahoo.com)

**SALES AND TECHNICAL ASSISTANCE SERVICE**