

## DGT4

### DGT4 - 4-CHANNEL WEIGHT TRANSMITTER



4-channel weight transmitter for weight transfer to PLC via fieldbus, analog output or RS485. It allows the reading and diagnostics of each load cell or each connected scale (up to 4).

#### Available versions:

PROFINET I/O | ETHERNET IP | ETHERCAT |  
MODBUS TCP | CANOPEN | DEVICENET |  
PROFIBUS | ANALOG OUTPUT | RS485

#### Integrated WebServer as standard

#### Working in cooperation with:

**PT.INTERSKALA MANDIRI INDONESIA**

GREEN SEDAYU BIZPARK, BLOK DM 11, N 62 - 11840 - KALIDERES, JAKARTA BARAT -  
INDONESIA  
Tel. +62 21 555 1470 Fax. +6221 555 1953  
interscale@yahoo.com

The best solution  
for advanced  
industrial  
applications

## MAIN FEATURES

- Power supply: 12-24Vdc
- Converter: A/D 24 bit with 4 channel
- Max scale number: 4
- Load cells connection: 4 or 6 wires (with sense)
- Operating modes:
  - Digital junction box
  - Multi-scale transmitter
- Conversion rate: up to 3200 conv./sec
- Selectable sampling rate: up to 400 conv./sec
- Displaying: up to 1.000.000d
- Signal sensitivity: 0,03  $\mu\text{V/d}$  (0,03  $\mu\text{V/e}$ )
- Resolution: 3.000.000 points
- Linearization: up to 8 points
- Connectable load cells: up to 8 350  $\Omega$  cells
- BUS: depending on the model (See version chart)
- Serial ports:
  - 1 RS232 for configuration from PC with "Dinitools®"
  - 1 RS485 Port (Mod. DGT4 / DGT4 AN)
- Analog output: 16 bit (DGT4AN Model) choosing between 4-20mA, 0-5Vdc or 0-10Vdc.
- Digital outputs: n. 2 configurable OUTPUTS
- Digital inputs: n. 2 configurable INPUTS
- Certifications:
  - OIML R76 (10000e o 3000 + 3000e) / R51 / R61 MID
  - UL Listed (upon request)
  - EU Type Examination Certificate (45501:2015)
- Case: ABS, for Din bar (106 x 90 x 58 mm)
- Calibration:
  - Theoretical (mV/V)
  - With sample weights
  - Remotely by WEB SERVER
  - From the keyboard
  - From PC with "Dinitools"
- Keyboard functions:
  - Zeroing
  - Tare
  - Function mode
  - Manual data printing/sending
  - On/Stand-by
- Program functions:
  - Setpoint
  - High resolution
  - Peak
  - Alibi Memory
  - Unit of measure conversion
- Keyboard: mechanical with 5 digits
- Display: 13mm red LED

## FUNCTIONS AND DATA AVAILABLE VIA FIELDBUS

- NET, GROSS and TARE weight
- DIGITAL INPUTS status
- RELAY OUTPUTS status
- SETPOINT setting
- Alibi memory writing and reading (optional)
- Weight status (eg positive, negative, stable, unstable)
  - Error conditions (eg overload, underload)
  - Calibration
- SETUP configuration
- Diagnostics of each converter channel

## INTEGRATED WEB SERVER

The integrated WEB SERVER allows complete diagnostics, calibration and remote configuration of the weight transmitter from ethernet network.


## UPON REQUEST

- UL certificated version
- Special programs according to customer specifications
- Kit for legal for trade approval


### DETAIL 1



#### DIGITAL EQUALISATION BOX MODE

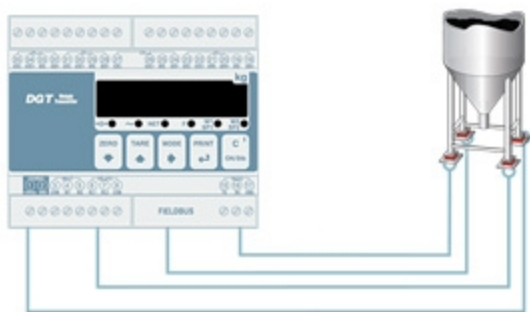

#### 4 SCALES MODE

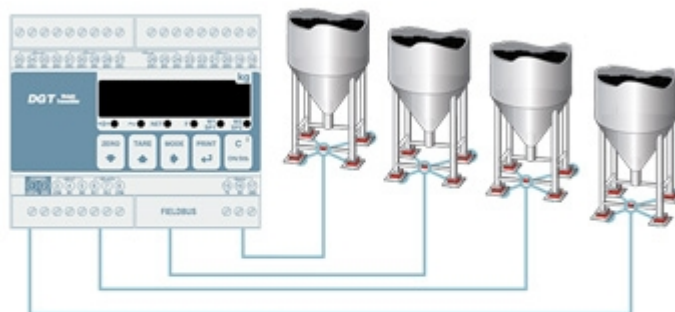

DETAIL 3

Home

Sign out

Change password

Release 1.0

Position

Product

Qty

Units

Dimensions

Unit

ID	GROSS	NET	DATE	UNIT	STATUS	
1	508	508	0	kg	OK NO-LS-CL NOTING OUTS-OUTS	<div>ZERO</div> <div>SAVE</div>

ACC

Mode

FRAMING TESTS

Unit

kg

Decimals

0

Capacity 1

10000

Capacity 2

0

Division 1

1

Division 2

1

CALIBRATION

Cal points

1

Weight

ADC

Zero

0

Point 1

10000

2147484

Point 2

0

0

Point 3

0

0

COMMANDS

KEYBOARD LOCK

KEYBOARD UNLOCK

SCALE REBOOT

WRITE PARAMETERS

WRITE SETPOINTS

SETPOINTS

Setpoint 1 on

Setpoint 1 off

Setpoint 2 on

Setpoint 2 off



[www.diniargeo.com](http://www.diniargeo.com)

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO  
FRANCE sari  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano - Modena - Italy  
Tel. +39.0536 843418

***PT.INTERSKALA MANDIRI INDONESIA***

GREEN SEDAYU BIZPARK, BLOK DM 11, N 62 - 11840 - KALIDERES, JAKARTA BARAT - INDONESIA

Tel. +62 21 555 1470 Fax. +6221 555 1953

[interscale@yahoo.com](mailto:interscale@yahoo.com)

**SALES AND TECHNICAL ASSISTANCE SERVICE**