

## TPWI EX3GD

### TPWI "EX" 3GD SERIES STAINLESS STEEL ATEX PALLET TRUCK SCALE



Pallet truck scales, with built-in electronic weighing, suitable for harsh working conditions and dangerous areas classified as hazardous (ZONE 2, 22) in accordance with Ex II 3G IIC T6 Gc X and Ex II 3D IIIC T115C° Dc X protection. The weight detection made with four Atex certified IP68 stainless steel load cells guarantees the precision in all work conditions. Structure entirely in stainless steel. Manufactured, calibrated and adjusted in Italy by Dini Argeo, using certified sample masses. Available also CE-M APPROVED.

Working in cooperation with:

**PT.INTERSKALA MANDIRI INDONESIA**

GREEN SEDAYU BIZPARK, BLOK DM 11, N 62 - 11840 - KALIDERES, JAKARTA BARAT - INDONESIA

Tel. +62 21 555 1470 Fax. +6221 555 1953  
interscale@yahoo.com

**The best solution  
for advanced  
industrial  
applications**

## MAIN FEATURES

- Maximum lifting capacity: 2000kg.
- Accuracy: +/- 0.1% of the maximum capacity in the versions for internal use.
- Accuracy: +/- 0.05% of the maximum capacity in the "M" approved versions.
- Fork dimensions 1182 x 550 x 80 mm.
- Weighs about 135 kg.
- Bearing structure entirely in extra thick STAINLESS steel.
- Lifting pump in STAINLESS steel.
- Antistatic driving wheels.
- Double loading rollers with a poliurethane coating.
- Four IP68 STAINLESS steel, Atex certified, shear-beam load cells.
- Weight indicator with waterproof IP68 STAINLESS STEEL case, easy to clean and resistant to harsh and corrosive environments; large high contrast 25mm backlit LCD display, easily visible also in poor lighting conditions and waterproof membrane keypad, with 17 numerical/functional keys.
- Calibration and Set-Up parameters configurable from keyboard or from PC.
- Power supply through extractable rechargeable battery, over 100-hour operating time. Battery rechargeable in safe zone only, connectable and disconnectable from the weighing system also in hazardous area.
- Programmable auto switch-off.
- Equipped with 110/230Vac 50 Hz battery charger.

## MAIN FUNCTIONS

- Zeroing, Tare, Printing (in a safe area only), numeric IDs
- High Resolution Weighing x 10
- Net/Gross or lb/kg conversion
- Accumulation
- Formula weighing
- +/- Checkweighing
- Percentage weighing
- Counting (Max. resolution of 1.500.000 divisions)
- Set Point Control (with optional interface)

## AVAILABLE UPON PRICE ESTIMATE

- 680 mm fork width.
- Special fork length from 850 to 1500 mm.
- Special capacity e/o divisions.
- High resolution.

## DETAIL 1



Extractable battery

## DETAIL 2




## DETAIL 3





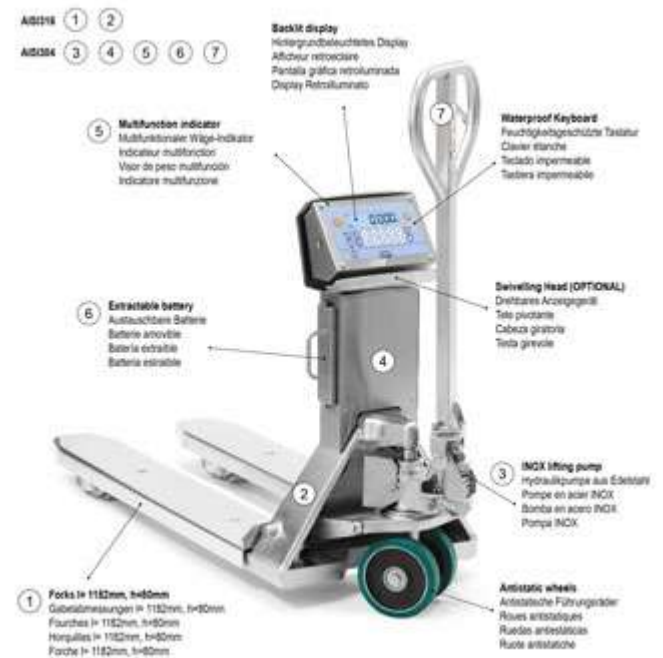

Orientable Head (OPTIONAL)

## DETAIL 4



VERSIONS

Available versions

|   | Codice   | Max<br>(kg)       | d<br>(kg)     | <br>(kg) |
|---|--|-------------------|---------------|---|
|  | TPW20IEX3GD  | 500 / 1000 / 2000 | 0,2 / 0,5 / 1 | --  |
|  | TPW20IEX3GDM  | 1000 / 2000       | --            | 0,5 / 1   |



www.diniargeo.com



DINI ARGEO  
FRANCE sarl  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano - Modena - Italy  
Tel. +39.0536 843418

***PT.INTERSKALA MANDIRI INDONESIA***

GREEN SEDAYU BIZPARK, BLOK DM 11, N 62 - 11840 - KALIDERES, JAKARTA BARAT - INDONESIA

Tel. +62 21 555 1470 Fax. +6221 555 1953

[interscale@yahoo.com](mailto:interscale@yahoo.com)

**SALES AND TECHNICAL ASSISTANCE SERVICE**