

WBK | Compression(column) Load Cell



Features

- ▶ Stainless steel construction
- ▶ Hermetically sealed
- ▶ IP68 protection
- ▶ Suitable for compression application
- ▶ OIML C3 approved
- ▶ Ex ia IIC T4 approved(Optional)

Options

- ▶ Accessory set

Application

- ▶ Hopper and Tank scales
- ▶ Truck scales

DESCRIPTION


WBK is a column, stainless steel compression Load Cell designed for hopper, tank and truck scales. A large range of capacities is available. Hermetic sealing and built-in surge protection ensure that this product can be used in harsh environment.

SPECIFICATION


Capacity(R.L.)	tf	10, 20, 25, 30, 50, 100	
Rated output(R.O.)	mV / V	2.0 ± 0.005	
Zero balance	mV / V	0.0 ± 0.020	
Accuracy Class	-	D3	C3
Non-linearity	% R.O.	≤ 0.03	≤ 0.02
Hysteresis	% R.O.	≤ 0.03	≤ 0.02
Combined Error	% R.O.	≤ 0.03	≤ 0.02
Repeatability	% R.O.	≤ 0.02	≤ 0.01
Creep for 30min	% R.O.	≤ 0.03	≤ 0.017
Return for 30min	% R.O.	≤ 0.03	≤ 0.017
Resolution	-	≤ 1/3000	≤ 1/5000
Division	mV / V	0.00067	0.0004
Temperature effect on	- Zero Value	%/10°C	≤ 0.03
	- Output value	%/10°C	≤ 0.03
Excitation	- Recommended	V	10
	- Maximum	V	15
Resistance	- Input	Ω	350 ± 3.5
	- Output	Ω	350 ± 3.5
	- Insulation	MΩ	> 2000
Comensated Temperature Range		°C	-10 to +40
Operating Temperature Range		°C	-40 to +70
Material & Plate		-	Stainless steel
Cable specification		-	Ø8 x 4P x 10M & Ø8 x 4P x 25M (P.V.C)
Platform size		-	Ø8 x 6P x 12M (Urethane)
Safety overload		% R.L.	150%

DIMENSION

▲ 10tf~30tf

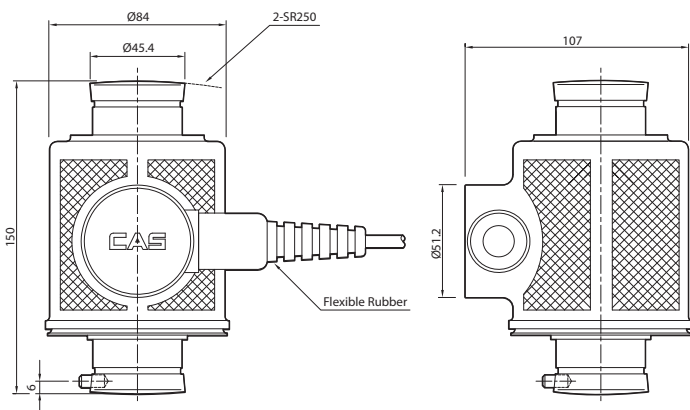


▼ 50tf~100tf

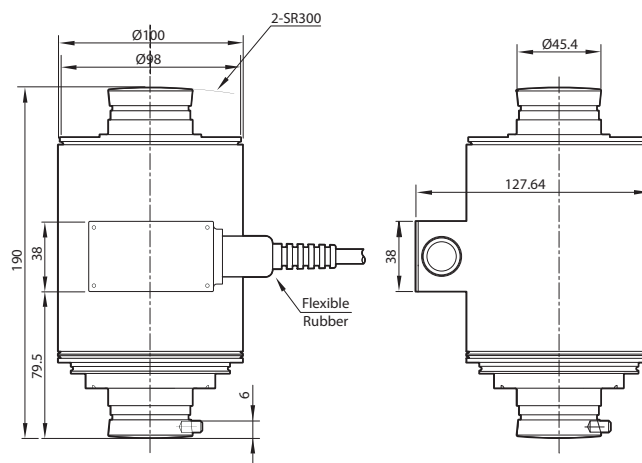


DIMENSION (WBK)


10tf~30tf ▶

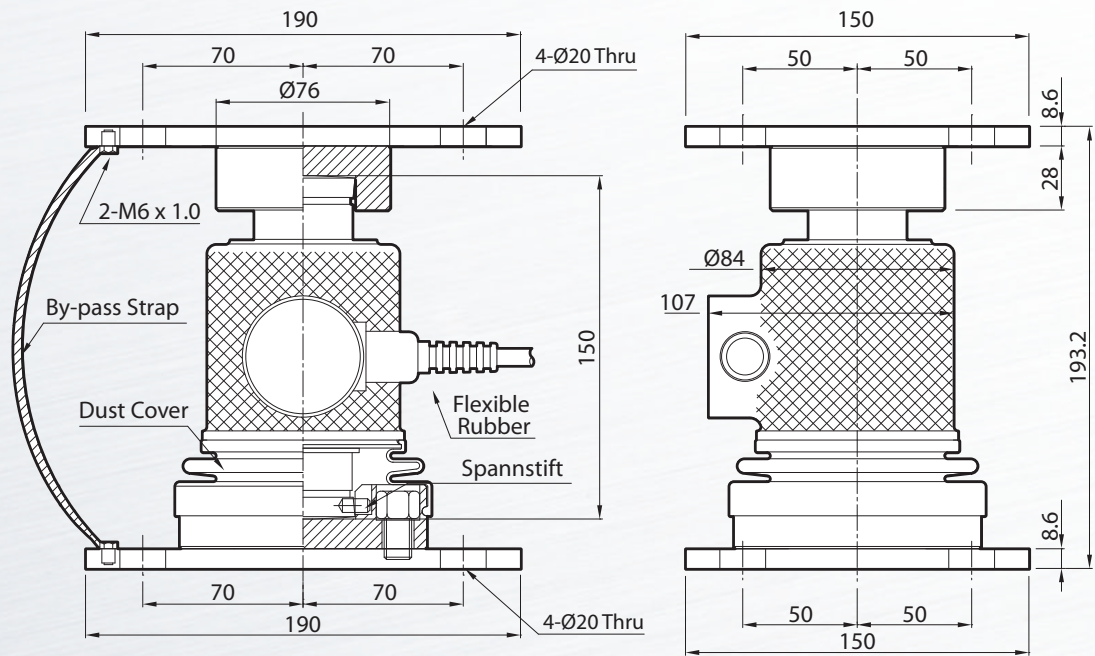

50tf~100tf ▶

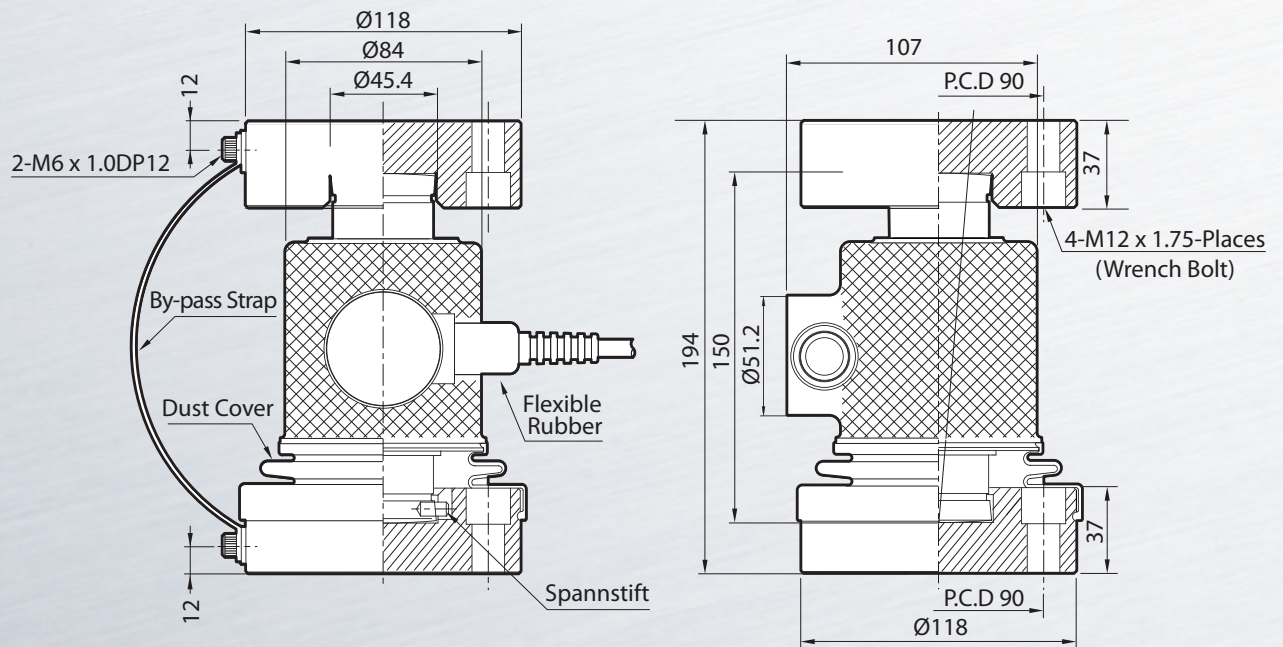

10tf~30tf ▶

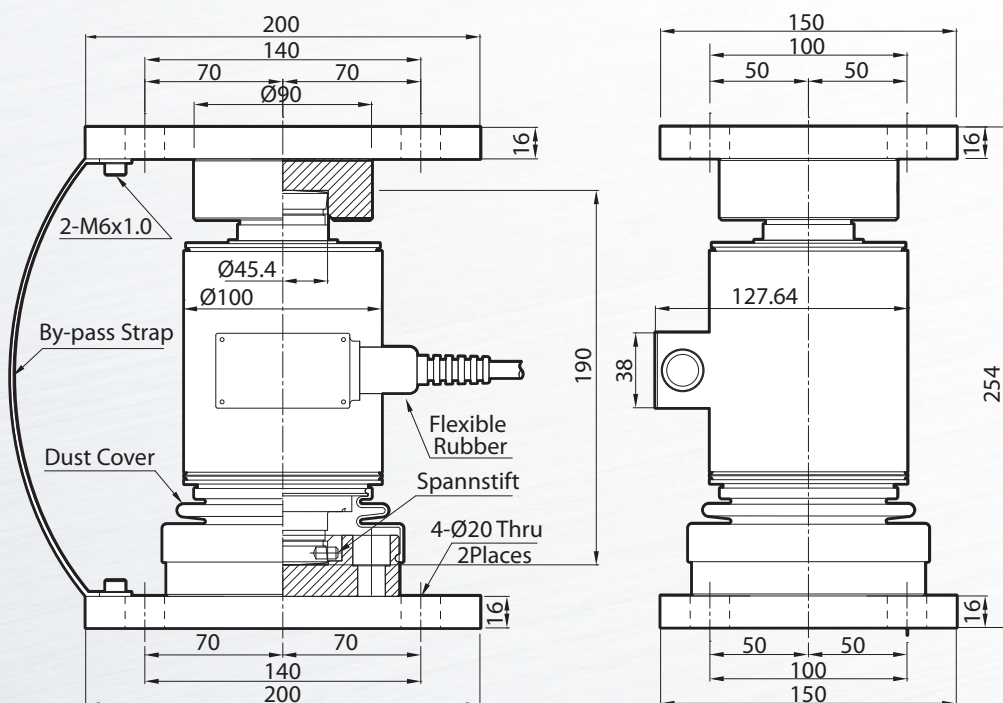

50tf~100tf ▶

