

INDUSTRIAL WEIGHING SOLUTION™

HD SERIES

High Resolution Bench Scale

HD is an advanced bench scale with high resolution and various functions. It is suitable for use in parts production, paint industry and logistics center. It can be connected to various printers for data collection and offer great mobility with its rechargeable battery.



High-Resolution Weighing (1/3,000~1/15,000)

Counting & Percent mode Support

Easy operation with 8 function Keys

Rechargeable Battery


Counting & Percent mode Supported



Easy operation with 8 function keys



Rechargeable Battery



Scan with your smartphone
to find more products



CAS
www.globalcas.com

HD SERIES


High Resolution Bench Scale

FEATURE

- Counting & Percent mode Supported
1 / 15,000 high-resolution and a more accurate counting, percentage modes are supported.



- Check-Weighing function
(HI/OK/LO is separately displayed)
Weight and Counting, percent mode are available.

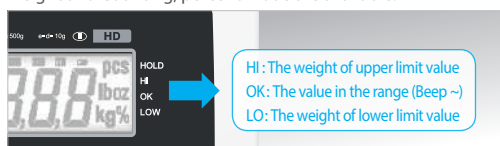

- Easy operation with 8 function keys
Various Function Keys offer easy operation.

Key	Descriptions	Key	Descriptions	Key	Descriptions
	Used to set the zero point to 0.00. Used as an ESC key in Setup Mode.		Used as an ENTER key.		PRINT key. Used to have number down.
	Used to enter a tare weight and Used to cancel a tare weight.		Used to calculate a unit weight of a sample. Used to enter next digit.		Used to turn ON or OFF the power.
	Used to convert the mode as below (kg > (g) > (N) > (WEIGHT LIMIT ON/OFF) > (COUNT LIMIT ON/OFF) > (kg)		Used to have number up.		

- Rechargeable Battery

The rechargeable battery increases portability and allows HDI to be used in environments where little or no power is available.
(Charging time : 12Hour / Battery life: 80Hour)



OPTION

- iM-Works
iM-Works can display and save a weight value via serial communication(RS-232C) between Scale and PC.



- Ticket Printer (DEP-50)



SPECIFICATION

Model	HD series		
Capacity(kg)	60	150	200
Repeatability(e=d)(g)	5	10	20
Resolution	1/15,000	1/7,500	1/7,500
Internal Resolution	1/600,000		
Display Type	LCD		
Weight Units	kg, lb		
Zero Range	±2%		
Tare Range	Full Capacity by Subtraction		
Stabilization Time	≤2 seconds		
Operation Temperature	0°C ~ 40°C		
Power	AC Adaptor 12V/800mA Internal rechargeable sealed acid battery		
Battery Life	80 hours continuous use with 12 hour recharge time		
Safe Overload Capacity	120% of capacity		
Product Weight(kg)	15		
Dimension(mm)	420(W) x 500(D) x 1000(H)		
Pan Size(mm)	420(W) x 500(D)		

APPLICATION

Parts Production
Paint Processing
Industrial production
Logistics Center

